



The **WISE** Choice



Sealed
Maintenance Free



Superior
Quality



Low
Corrosion



Longer
Life

A U T O M O T I V E B A T T E R Y



Why Choose **Eastman**

Customer-Centric Excellence: Where You Come First, Every Time.

Our customers are the heartbeat, igniting our commitment to providing products and services that deeply resonate, bringing both genuine benefit and inspiration.

Premium Quality Assurance: Performance Unleashed, Quality Assured.

Eastman ensures the finest components for optimal performance. Our 12-step quality control ensures unparalleled quality, leading to one of the industry's lowest claim ratios.

Unmatched Variety of Automotive Batteries: Powering Your Drive, Tailored to Your Needs.

Whether you own a fleet or a private car, Eastman provides the perfect battery solution. Our diverse range caters to all, ensuring cost-effectiveness and reliability for every journey.

Continuous Evolution: Innovation Never Rests, Neither Do We.

Eastman goes beyond mere growth, focusing on continuous improvement in technology and features. Our commitment to environmental friendliness ensures a sustainable and evolving product line.

Support and Service: More Than Service, It's a Connection

Our support and service stand as pillars of this heartfelt dedication, ensuring your journey with Eastman is not just a transaction but an emotional connection.

Trust Eastman for Excellence and Sustainability: Driving Trust, Shaping Tomorrow.

Eastman is your partner for a journey fuelled by excellence and sustainability.

Trust us to deliver products that not only meet your expectations but also contribute to a greener, more sustainable future.

OUT-PERFORMING STATE-OF-THE-ART TECHNOLOGY

- The positive plate is made using **grid cast technology**.
- The negative plate is made using **expanded grid technology**.
- Thicker grid which leads to a longer life of the battery as compared to competition, which also results to **low corrosion**.



Advanced
Grid Design



Glass Mat
Assembly



Positive Plate
Hybrid Grid Casting

- Delivers higher corrosion resistance and has a **longer life span** at high temperature due to the high content of Sn (tin) in the grid alloy.
- Made with **C21 alloy technology**.
- **Double clad separation**-high reliability and life expectancy.
- Special side vented cover design – **Excellent spill – resistant** characteristics.

AUTOMOTIVE BATTERY SPECIFICATION



MADE IN KOREA

PASSENGER CAR BATTERIES								
Sr.No.	Model No.	AH	Dimension (mm, L x W x H)	CCA	Cell Layout	Terminal Shape	Base Hold	Pallet Qty
1	42B19L	35	187 X 127 X 226(mm)	300	0	SMALL	OPTIONAL	148
2	42B19R	35	187 X 127 X 226(mm)	300	1	SMALL	OPTIONAL	148
3	44B24L	40	238 X 129 X 225(mm)	300	0	SMALL	OPTIONAL	112
4	44B24LS	40	238 X 129 X 225(mm)	300	0	STANDARD	OPTIONAL	112
5	44B24RS	40	238 X 129 X 225(mm)	300	1	SMALL	OPTIONAL	112
6	44B24RS	40	238 X 129 X 225(mm)	300	1	STANDARD	OPTIONAL	112
7	55B24L	45	238 X 129 X 225(mm)	430	0	SMALL	OPTIONAL	112
8	55B24LS	45	238 X 129 X 225(mm)	430	0	STANDARD	OPTIONAL	112
9	55B24R	45	238 X 129 X 225(mm)	430	1	SMALL	OPTIONAL	112
10	55B24RS	45	238 X 129 X 225(mm)	430	1	STANDARD	OPTIONAL	112
11	50D20L	50	202 X 173 X 225(mm)	450	0	STANDARD	OPTIONAL	104
12	55D23L	60	232 X 173 X 225(mm)	500	0	STANDARD	OPTIONAL	88
13	55D23R	60	232 X 173 X 225(mm)	500	1	STANDARD	OPTIONAL	88
14	75D23L	65	232 X 173 X 225(mm)	580	0	STANDARD	OPTIONAL	88
15	75D23R	65	232 X 173 X 225(mm)	580	1	STANDARD	OPTIONAL	88
16	48D26L	50	260 X 173 X 222(mm)	420	0	STANDARD	OPTIONAL	80
17	48D26R	50	260 X 173 X 222(mm)	420	1	STANDARD	OPTIONAL	80
18	55D26L	60	260 X 173 X 222(mm)	500	0	STANDARD	OPTIONAL	80
19	55D26R	60	260 X 173 X 222(mm)	500	1	STANDARD	OPTIONAL	80
20	80D26L	70	260 X 173 X 222(mm)	600	0	STANDARD	OPTIONAL	80
21	80D26R	70	260 X 173 X 222(mm)	600	1	STANDARD	OPTIONAL	80
22	NX110-5ZL	75	260 X 173 X 222(mm)	640	0	STANDARD	OPTIONAL	80
23	NX110-5Z	75	260 X 173 X 222(mm)	640	1	STANDARD	OPTIONAL	80
24	65D31L	70	303 X 173 X 225(mm)	560	0	STANDARD	OPTIONAL	72
25	65D31R	70	303 X 173 X 225(mm)	560	1	STANDARD	OPTIONAL	72
26	95D31L	80	303 X 173 X 225(mm)	680	0	STANDARD	OPTIONAL	72
27	95D31R	80	303 X 173 X 225(mm)	680	1	STANDARD	OPTIONAL	72
28	105D31L	90	303 X 173 X 225(mm)	780	0	STANDARD	OPTIONAL	72
29	105D31R	90	303 X 173 X 225(mm)	780	1	STANDARD	OPTIONAL	72
30	115D31L	95	303 X 173 X 225(mm)	790	0	STANDARD	OPTIONAL	72
31	115D31R	95	303 X 173 X 225(mm)	790	1	STANDARD	OPTIONAL	72
32	125D31L	100	303 X 173 X 225(mm)	790	0	STANDARD	OPTIONAL	72
33	125D31R	100	303 X 173 X 225(mm)	790	1	STANDARD	OPTIONAL	72
34	54018	40	175 X 175 X 190(mm)	350	0	STANDARD	APPLIED	120
35	56529	35	208 X 175 X 175(mm)	340	0	STANDARD	APPLIED	130
36	54459	44	208 X 175 X 190(mm)	350	0	STANDARD	APPLIED	130
37	55054	50	208 X 175 X 190(mm)	420	0	STANDARD	APPLIED	130
38	55559	55	245 X 175 X 190(mm)	480	0	STANDARD	APPLIED	110
39	56219	62	245 X 175 X 190(mm)	510	0	STANDARD	APPLIED	110
40	56217	62	245 X 175 X 190(mm)	510	1	STANDARD	APPLIED	110
41	56048	60	269 X 174 X 226(mm)	500	0	STANDARD	APPLIED	80
42	56068	60	269 X 174 X 226(mm)	500	1	STANDARD	APPLIED	80
43	57029	70	269 X 174 X 226(mm)	560	0	STANDARD	APPLIED	80
44	56530	65	277 X 175 X 175(mm)	580	0	STANDARD	APPLIED	90
45	57113	71	277 X 175 X 175(mm)	620	0	STANDARD	APPLIED	90
46	56638	66	277 X 175 X 190(mm)	580	0	STANDARD	APPLIED	90
47	57220	72	277 X 175 X 190(mm)	620	0	STANDARD	APPLIED	90
48	57412	74	277 X 175 X 190(mm)	620	0	STANDARD	APPLIED	90
49	57413	74	277 X 175 X 190(mm)	620	1	STANDARD	APPLIED	90
50	58014	80	277 X 175 X 175(mm)	730	0	STANDARD	APPLIED	90
51	59042	90	315 X 175 X 190(mm)	780	0	STANDARD	APPLIED	90
52	59015	90	315 X 175 X 175(mm)	820	0	STANDARD	APPLIED	75
53	58827	88	353 X 175 X 190(mm)	730	0	STANDARD	APPLIED	75
54	60044	100	353 X 175 X 190(mm)	850	0	STANDARD	APPLIED	75
55	50AL	40	208 X 171 X 205(mm)	520	0	STANDARD	APPLIED	104
56	50AR	40	208 X 171 X 205(mm)	520	1	STANDARD	APPLIED	104
57	60AL	55	231 X 171 X 205(mm)	660	0	STANDARD	APPLIED	96
58	60AR	55	231 X 171 X 205(mm)	660	1	STANDARD	APPLIED	96
59	78-770	70	260 X 179 X 185(mm)	770	1	SIDE	APPLIED	80
60	48-700	85	277 X 175 X 190(mm)	690	1	STANDARD	APPLIED	90
61	94R-750	90	315 X 175 X 190(mm)	750	0	STANDARD	APPLIED	90
HEAVY DUTY COMMERCIAL BATTERIES								
Sr.No.	Model No.	AH	Dimension (mm, L x W x H)	CCA	Cell Layout	Terminal Shape	Base Hold	Pallet Qty
62	1000LA	100	330 X 173 X 240(mm)	870	0	STANDARD	X	60
63	1000RA	100	330 X 173 X 240(mm)	870	1	STANDARD	X	60
64	1000LS	100	330 X 173 X 240(mm)	870	0	STUD	X	60
65	1000RS	100	330 X 173 X 240(mm)	870	1	STUD	X	60
66	95E41R	100	410 X 175 X 235(mm)	830	1	STANDARD	X	48
67	95E41L	100	410 X 175 X 235(mm)	830	0	STANDARD	X	48
68	MFI20	120	505 X 183 X 240(mm)	850	D	STANDARD	X	40
69	MFI20L	120	505 X 183 X 240(mm)	850	E	STANDARD	X	40
70	MFI35	135	508 X 222 X 241(mm)	850	D	STANDARD	X	32
71	MFI35L	135	508 X 222 X 241(mm)	850	E	STANDARD	X	32
72	HMF150	150	508 X 222 X 241(mm)	1000	D	STANDARD	X	32
73	HMF150L	150	508 X 222 X 241(mm)	1000	E	STANDARD	X	32

AUTOMOTIVE BATTERY SPECIFICATION



MADE IN KOREA

HEAVY DUTY COMMERCIAL BATTERIES

Sr.No.	Model No.	AH	Dimension (mm, L x W x H)	CCA	Cell Layout	Terminal Shape	Base Hold	Pallet Qty
74	MF170	170	508 X 222 X 213(mm)	1000	D	STANDARD	X	32
75	MF170L	170	508 X 222 X 213(mm)	1000	E	STANDARD	X	32
76	HMF200	200	522 X 279 X 220(mm)	1200	D	STANDARD	X	24
77	HMF200L	200	522 X 279 X 220(mm)	1200	E	STANDARD	X	24
78	63530	135	513 X 189 X 223(mm)	850	E	STANDARD	X	36
79	64020	140	513 X 189 X 223(mm)	950	E	STANDARD	X	36
80	67018	170	513 X 224 X 218(mm)	1000	E	STANDARD	X	32
81	68032	180	513 X 224 X 218(mm)	1100	E	STANDARD	X	32
82	68021	180	518 X 276 X 239(mm)	1100	E	STANDARD	X	24
83	70027	200	518 X 276 X 239(mm)	1050	E	STANDARD	X	24
84	73011	230	518 X 276 X 239(mm)	1200	E	STANDARD	X	24
85	31-1000S	110	330 X 173 X 239(mm)	1000	1	STUD	X	60
86	31-1000A	110	330 X 173 X 239(mm)	1000	1	STANDARD	X	60

EFB STANDARD & EFB SMART BATTERIES

Sr.No.	Model No.	AH	Dimension (mm, L x W x H)	CCA	Cell Layout	Terminal Shape	Base Hold	Pallet Qty
87	EFB K42L	35	187 X 127 X 223(mm)	370	0	SMALL	OPTIONAL	148
88	EFB K42LS	35	187 X 127 X 223(mm)	370	0	STANDARD	OPTIONAL	148
89	EFB N55L	55	238 X 129 X 223(mm)	460	0	SMALL	OPTIONAL	112
90	EFB N55LS	55	238 X 129 X 223(mm)	460	0	STANDARD	OPTIONAL	112
91	EFB Q85L	65	232 X 173 X 225(mm)	550	0	STANDARD	OPTIONAL	88
92	EFB S95L	70	260 X 174 X 225(mm)	680	0	STANDARD	OPTIONAL	80
93	EFB T110L	95	304 X 172 X 225(mm)	760	0	STANDARD	OPTIONAL	72
94	EFB LN1	50	208 X 175 X 190(mm)	480	0	STANDARD	B3	130
95	EFB LN2	60	245 X 175 X 190(mm)	560	0	STANDARD	B3	110
96	EFB LBN3	65	277 X 175 X 175(mm)	650	0	STANDARD	B3	90
97	EFB LN3	70	277 X 175 X 190(mm)	650	0	STANDARD	B3	90
98	EFB LBN4	75	315 X 175 X 175(mm)	730	0	STANDARD	B3	90
99	EFB LN4	80	315 X 175 X 190(mm)	730	0	STANDARD	B3	90
100	EFB LN5	95	353 X 175 X 190(mm)	850	0	STANDARD	B3	75
101	EFB K42L (SMART)	35	187 X 127 X 223(mm)	300	0	SMALL	OPTIONAL	148
102	EFB K42LS (SMART)	35	187 X 127 X 223(mm)	300	0	STANDARD	OPTIONAL	148
103	EFB N55L (SMART)	45	238 X 129 X 223(mm)	430	0	SMALL	OPTIONAL	112
104	EFB N55LS (SMART)	45	238 X 129 X 223(mm)	430	0	STANDARD	OPTIONAL	112
105	EFB Q85L (SMART)	60	232 X 173 X 225(mm)	500	0	STANDARD	OPTIONAL	88
106	EFB S95L (SMART)	70	260 X 174 X 225(mm)	600	0	STANDARD	OPTIONAL	80
107	EFB T110L (SMART)	90	304 X 172 X 225(mm)	710	0	STANDARD	OPTIONAL	72
108	EFB LN1 (SMART-44)	44	208 X 175 X 190(mm)	350	0	STANDARD	B3	130
109	EFB LN2 (SMART-55)	55	245 X 175 X 190(mm)	480	0	STANDARD	B3	110
110	EFB LN3 (SMART-66)	66	277 X 175 X 190(mm)	580	0	STANDARD	B3	90
111	EFB LN5 (SMART-100)	100	353 X 175 X 190(mm)	850	0	STANDARD	B3	72


AGM BATTERIES

Sr.No.	Model No.	AH	Dimension (mm, L x W x H)	CCA	Cell Layout	Terminal Shape	Base Hold	Pallet Qty
112	AGM L1-50	50	208 X 175 X 190(mm)	560	0	STANDARD	B3	100
113	AGM L2-60	60	245 X 175 X 190(mm)	640	0	STANDARD	B3	80
114	AGM L3-70	70	277 X 175 X 190(mm)	760	0	STANDARD	B3	72
115	AGM L4-80	80	277 X 175 X 190(mm)	800	0	STANDARD	B3	72
116	AGM L5-95	95	353 X 175 X 190(mm)	850	0	STANDARD	B3	60
117	AGM L6-105	105	393 X 175 X 190(mm)	950	0	STANDARD	B3	48


GENERAL UTILITY & MARINE BATTERIES

Sr.No.	Model No.	AH	Dimension (mm, L x W x H)	CCA	Cell Layout	Terminal Shape	Base Hold	Pallet Qty
118	24MS-680	80	260 X 174 X 222(mm)	680	1	MARINE	APPLIED	80
119	27MS-730	85	304 X 173 X 225(mm)	730	1	MARINE	APPLIED	72
120	31HC-850S	108	330 X 173 X 217(mm)	850	1	STUD	X	60
121	31HC-850A	108	330 X 173 X 217(mm)	850	1	STANDARD	X	60


Layout for JIS and DIN

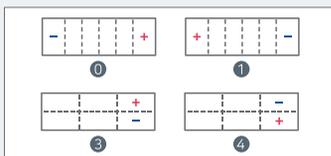


Base Hold Down

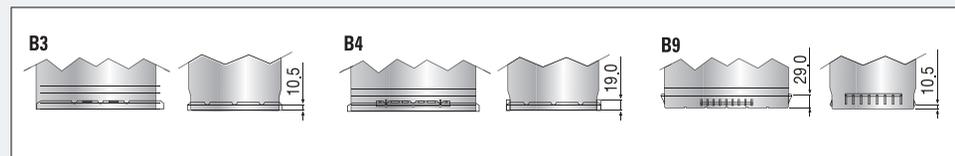

Terminal Type

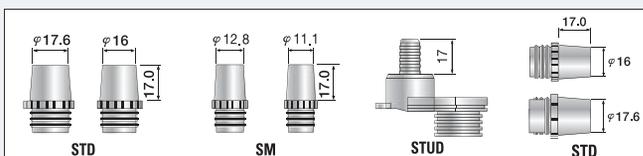

BCI Cell Layout

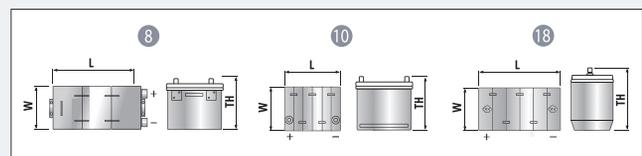

MAINTENANCE



01. The battery should be charged if it is kept idle for more than three months.



02. The vent holes on both sides of the battery upper cover or on the vent plug should be checked regularly. Keep the holes from being blocked by dust and ice water to avoid poor exhaust, shell deformation and burst.



03. The battery can't be used any more if the battery terminals are burned.

04. Test the reserved capacity firstly during the test of battery performance.



05. For batteries with indicator, if the indicator turns white during use, it may be caused by the bubbles around the indicator ball. Shake the battery carefully, if the indicator turns green, it means the battery can still be used. If the indicator keeps white, the battery is in lack of electrolyte. Then the battery should be replaced.

06. Don't use the electric equipments in the car for a long time if the car generator is not working, like the lamps, air conditioners and audio. Otherwise the battery will deeply discharge. The battery lifetime will be reduced, and the car may can't be started.



07. Usually it takes 3 to 5 seconds to start a car at first time. The restarting should be at intervals of more than 15 seconds. If the car fails to be started after many times, you need to check if there is any damage on the battery or the circuit. This situation usually happens in winter.

08. We can't avoid the natural electric loss caused by the vehicle load. So if the car will be parked for more than 10 days, pls break the negative connection wire of the battery to avoid electric loss caused by the vehicle load and deep discharging.





www.eastmanworld.com
marketing@eastmanworld.com

AMPS MIDDLE EAST FZ LLC
#703 - 704, 7TH Floor, Deira Twin Tower,
Baniyas Square, Deira, Dubai (UAE)

EASTMAN AUTO & POWER LTD.
ASF Towers, 249, Udyog Vihar Phase-4,
Gurugram, Haryana-122016, India

GUANGDONG EASTMAN NEW ENERGY CO., LTD
#1602, Meilan business centre,
Intersection of Xixiang Avenue and
Qianjin Second Road, Bao'an, District,
Shenzhen-518102, China

Follow us on »

© @eastman_world 📺 @EastmanWorld 📺 @EastmanWorld