



The **WISE** Choice

## EASTMAN WORLD

---

Welcome to Eastman World - Your Global Partner in Energy Solutions!



## HYBRID INVERTER

---

Three Phase - 3 ~ 30kW

## HYBRID INVERTER THREE PHASE 3 ~ 30 kW

The Eastman low voltage Series storage Inverters are designed to increase energy independence for homeowners. The power range is from 3kW & 3.6kW, compatible with low voltage (40-60V) batteries.



Energy management is based on time-of-use and demand charge rate structures, significantly reduce the amount of energy purchased from the public grid.

Thanks for the UPS function (switch time < 10ms), enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading. The Eastman low voltage Series storage inverters integrated with Arc Fault Circuit Interrupter (AFCI) and Rapid Shutdown.

### Product Features

 <b>SODIUM-ION BATTERY</b> <small>Support sodium-ion battery</small>	 <b>WIDE RANGE</b> <small>Voltage Range (150-800V)</small>	 <b>100% UNBALANCE</b> <small>Support Unbalance Load</small>	 <b>Max. 1.5</b> <b>PV OVERSIZE</b> <small>1.5 Times PV Oversize</small>	 <b>Max. 40A</b> <b>MAX. 40A<sub>dc</sub></b> <small>String Current Up To 40A</small>	 <b>&lt;10 ms</b> <b>UPS FUNCTION</b> <small>Switch Time &lt; 10ms</small>	 <b>INPUT</b> <small>Support Generator</small>
---	---	---	--	--	--	---

Support for Time-of-use Optimization 

Configurable Operation Modes 

Arc Fault Circuit Interrupter (AFCI) (Optional) 


 Build in Anti-feed- in Function

 Compact Size and Easy Installation

 Smart Monitoring & Remote Firmware Upgrade

# HYBRID INVERTER (THREE PHASE)



## Connection Diagram

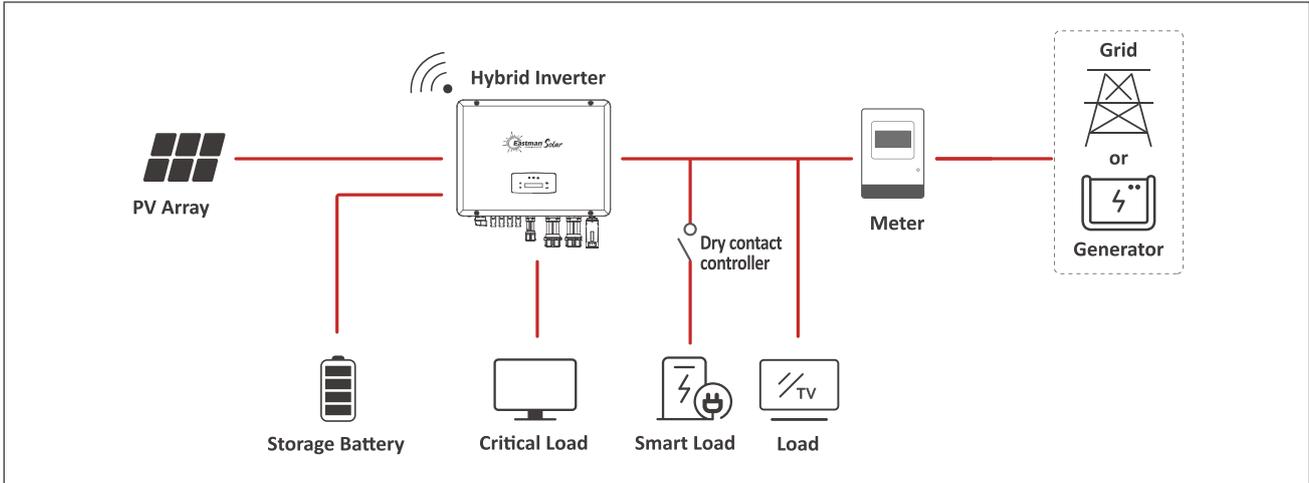

Optimizing Self-Consumption (on-grid)


+

Emergency Power Supply (off-grid)

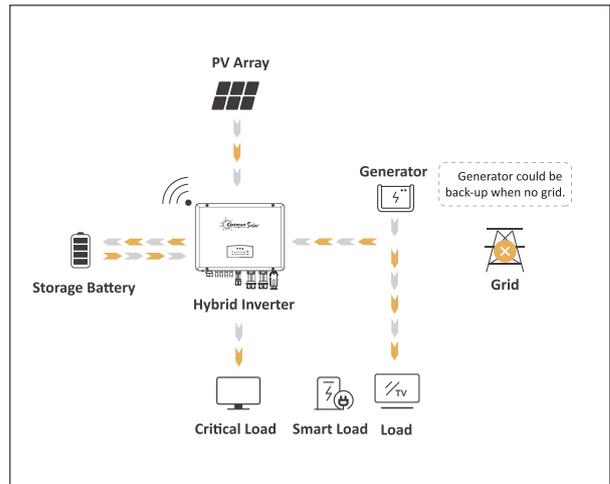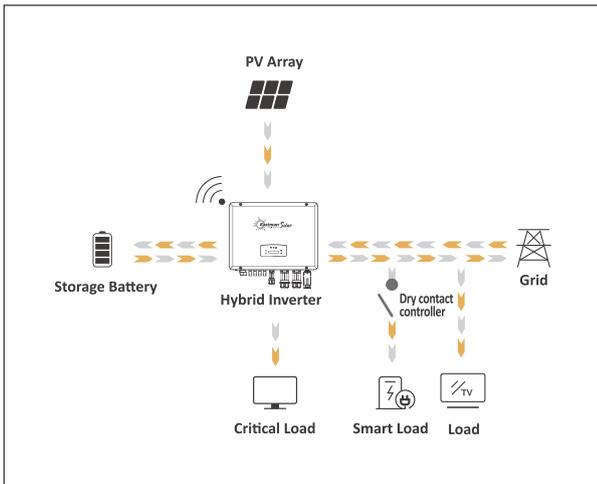

## Optimizing Self-Consumption Mode

With energy storage system installed, users may also be able to change from a flat rate electricity tariff to a time-of-use tariff. For the areas and regions, where peak shaving can be applied.

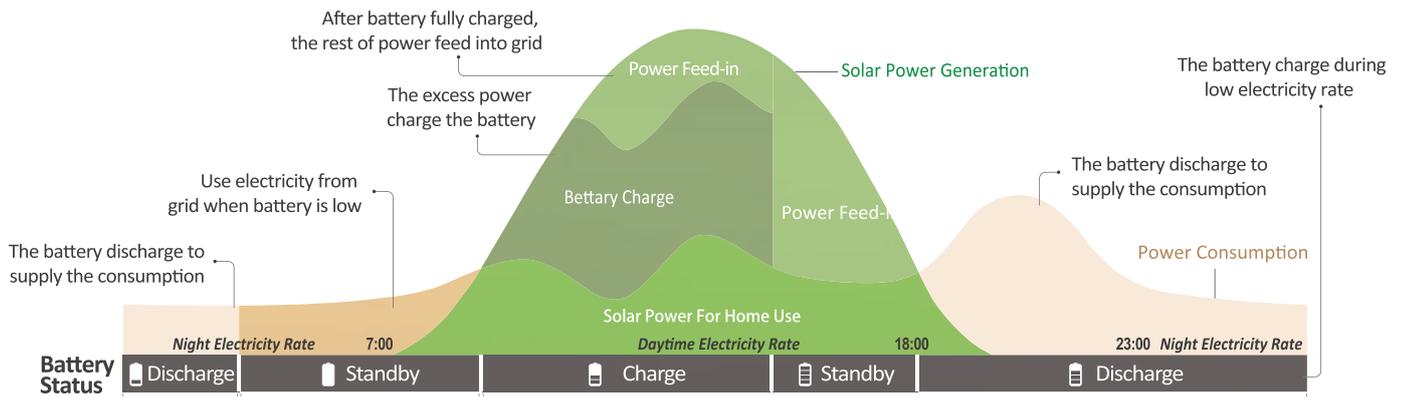

# HYBRID INVERTER (THREE PHASE)



## Product Specifications

3 ~ 10 kW

PV Input	ES3KTHH	ES4KTHH	ES5KTHH	ES6KTHH	ES8KTHH	ES10KTHH
Max. DC Input Power (kW)	5	6	7.5	9	12	15
Max. PV Voltage (V)	1000					
Rated DC Input Voltage (V)	620					
DC Input Voltage Range (V)	150-1000					
MPPT Voltage Range (V)	150-850					
Full MPPT Range(V)	200-850		250-850		300-850	500-850
Start-up Voltage (V)	160					
Max. DC Input Current (A)	20x2					
Max. Short Current(A)	30x2					
No. of MPPT Tracker / Strings	2/2					
Battery Port						
Battery Nominal Voltage (V)	200	200	200	250	300	400
Battery Voltage Range (V)	150-800					
Max. Charge/Discharge Current (A)	30					
Max. Charge/Discharge Power (kW)	3	4	5	6	8	10
Charging Curve	3 Stages					
Compatible Battery Type	Li-ion / Lead-acid / Sodium metal chloride battery.					
AC Grid						
Nominal AC Output Power (kW)	3	4	5	6	8	10
Max. AC Input/Output Power (kVA)	4.5 / 3.3	6 / 4.4	7.5 / 5.5	9 / 6.6	12 / 8.8	15 / 11
Max. AC Output Current (A)	5.3	7	8.5	10.5	13.5	17
Nominal AC Voltage (V)	230/400					
Nominal AC Frequency (Hz)	50/60					
Power Factor	1 (-0.8-0.8) adjustable					
Current THD (%)	<3%					
AC Load Output (Back-up)						
Nominal Output Power (VA)	3000	4000	5000	6000	8000	10000
Nominal Output Voltage (V)	230/400					
Nominal Output Frequency (Hz)	50/60					
Nominal Output Current (A)	4.4	5.8	7.3	8.7	11.6	14.5
Peak Output Power	3300VA, 60s	4400VA, 60s	5500VA, 60s	6600VA, 60s	8800VA, 60s	11000VA, 60s
THDV (with linear load)	<3%					
Switching Time (ms)	<10					
Efficiency						
Europe Efficiency	97.50%					
Max. Efficiency	98.00%			98.20%		
Battery Charge/Discharge Efficiency	98.00%					
Protection						
Reverse Polarity Protection	Yes					
Over Current / Voltage Protection	Yes					
Anti-islanding Protection	Yes					
AC Short-circuit Protection	Yes					
Leakage Current Detection	Yes					
Ground Fault Monitoring	Yes					
Grid Monitoring	Yes					
Enclosure Protect Level	IP65					
General Data						
Dimensions (W x H x D, mm)	370 x 497 x 192 mm					
Weight (kg)	20.8kg					
Topology	Transformerless					
Cooling Concept	Natural Convection			Intelligent Fan		
Relatively Humidity	0-100%					
Operating Temperature Range (°C)	-25 to 60 °C					
Operating Altitude (m)	<4000					
Noise Emission (dB)	<30					
Standby Consumption (W)	<5					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G					
Certification & Approvals	NRS097, G98/G99, EN50549-1, C10/C11,VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2, IEC62116, IEC61727, UNE217001:2020					
EMC	EN61000-6-2, EN61000-6-3					

Product Specification are subject to change without prior notice

# HYBRID INVERTER (THREE PHASE)



## Product Specifications

12 ~ 30 kW

PV Input	ES12KTHH	ES15KTHH	ES17KTHH	ES20KTHH	ES25KTHH	ES30KTHH
Max. DC Input Power (kW)	18	22.5	25.5	30	37.5	45
Max. PV Voltage (V)	1000					
Rated DC Input Voltage (V)	620					
DC Input Voltage Range (V)	150-1000					
MPPT Voltage Range (V)	150-850					
Full MPPT Range(V)	500-850					
Start-up Voltage (V)	160					
Max. DC Input Current (A)	20x2	20+32	32x2		40x2	
Max. Short Current(A)	30x2	30+48	48x2		60x2	
No. of MPPT Tracker / Strings	2/2	2/3	2/4		2/4	
Battery Port						
Battery Nominal Voltage (V)	450	500	400	500	500	550
Battery Voltage Range (V)	150-800					
Max. Charge/Discharge Current (A)	30	50	50	50	60	60
Max. Charge/Discharge Power (kW)	12	15	17	20	25	30
Charging Curve	3 Stages					
Compatible Battery Type	Li-ion / Lead-acid / Sodium metal chloride battery.					
AC Grid						
Nominal AC Output Power (kW)	12	15	17	20	25	30
Max. AC Input/Output Power (kVA)	18 / 13.2	22.5 / 16.5	25.5 / 18.7	30 / 22	37.5 / 27.5	45 / 33
Max. AC Output Current (A)	21.5	27	30	32	40	48
Nominal AC Voltage (V)	230/400					
Nominal AC Frequency (Hz)	50/60					
Power Factor	1 (-0.8-0.8) adjustable					
Current THD (%)	<3%					
AC Load Output (Back-up)						
Nominal Output Power (VA)	12000	15000	17000	20000	25000	30000
Nominal Output Voltage (V)	230/400					
Nominal Output Frequency (Hz)	50/60					
Nominal Output Current (A)	17.4	21.8	24.7	29	36.3	43.5
Peak Output Power	13200VA, 60s	16500VA, 60s	18700VA, 60s	22000VA, 60s	27500VA, 60s	33000VA, 60s
THDV (with linear load)	<3%					
Switching Time (ms)	<10					
Efficiency						
Europe Efficiency	97.50%		97.80%		98.00%	98.10%
Max. Efficiency	98.30%					98.50%
Battery Charge/Discharge Efficiency	98.00%					
Protection						
Reverse Polarity Protection	Yes					
Over Current / Voltage Protection	Yes					
Anti-islanding Protection	Yes					
AC Short-circuit Protection	Yes					
Leakage Current Detection	Yes					
Ground Fault Monitoring	Yes					
Grid Monitoring	Yes					
Enclosure Protect Level	IP65					
General Data						
Dimensions (W x H x D, mm)	370 x 497 x 192 mm			558 x 535 x 260 mm		
Weight (kg)	20.8kg		29kg		36kg	
Topology	Transformerless					
Cooling Concept	Intelligent Fan					
Relatively Humidity	0-100%					
Operating Temperature Range (°C)	-25 to 60 °C					
Operating Altitude (m)	<4000					
Noise Emission (dB)	<30		<40			
Standby Consumption (W)	<5					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G					
Certification & Approvals	NRS097, G98/G99, EN50549-1, C10/C11,VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2, IEC62116, IEC61727, UNE217001:2020					
EMC	EN61000-6-2, EN61000-6-3					

Product Specification are subject to change without prior notice



[www.eastmanworld.com](http://www.eastmanworld.com)  
[marketing@eastmanworld.com](mailto:marketing@eastmanworld.com)

**AMPS MIDDLE EAST FZ LLC**

#703, 7<sup>TH</sup> Floor, Deira Twin Tower,  
Baniyas Square, Deira, Dubai (UAE)

**EASTMAN AUTO & POWER LTD.**

ASF Towers, 249, Udyog Vihar Phase-4, Gurugram,  
Haryana-122016, India

**GUANGDONG EASTMAN NEW ENERGY CO., LTD**

#1602, Meilan business centre, Intersection of Xixiang Avenue  
and Qianjin Second Road, Bao'an, District, Shenzhen-518102, China

Follow us on »  @eastman\_world  @EastmanWorld  @EastmanWorld